

# VICORE™ Vision System



## Key Features

- » Two-camera solution with PoE and integrated I/O drives down system cost
- » Visible, thermal and 3D inspections
- » Quad-core processor and supporting system resources for demanding applications
- » Industrial Ethernet data port for efficient factory floor communications
- » Choice of application software to suit user and application needs
- » Full complement of vision tools and capabilities
- » Remote access ready
- » Small DIN mountable form factor consumes minimal cabinet space

## Dual Camera Smart Vision System

VICORE is a dual camera vision system that combines with an assortment of Teledyne sensor and software technologies to deliver performance, flexibility and ease-of-integration for applications in industrial automation.

This versatile system offers excellent performance for inspection applications using traditional 2D imaging, thermal imaging, 3D imaging or a combination thereof. Its small, book style format consumes minimal cabinet space and provides convenient, front-accessible connections for cameras, I/O and System components. This includes a dedicated industrial Ethernet port that offers efficient communication with complementary factory devices using Ethernet/IP or Profinet.

### Typical Applications

- » Traditional inspection of parts or assemblies using one or two 2D area scan sensors
- » Inspection of thermal features on assemblies using one or two IR sensors
- » Height based feature measurements using one or two 3D profile sensors.
- » Surface applications using one or two 2D area scan sensors combined with multi-segment lighting (Shape from Shading)

### Deployment Configurations

- » Standalone with attached HDMI display and keyboard
- » Remotely through LAN port. Project engineer can setup and maintain the solution using remote desktop on their PC

### The Smart Choice

The VICORE system is sensor, factory integration and user friendly. Its built-in hardware and software features make it a smart choice for anyone looking for performance and flexibility in system design at an affordable price.

### Supported Sensors

VICORE camera interfaces support the following Teledyne Sensor types:



Genie™ Nano	Calibir™	Z-Trak™
Wide range of low cost 2D area cameras featuring CMOS sensors from VGA to 25 Megapixel resolution.	Uncooled IR cameras are ideal for inspecting thermal characteristics on parts or assemblies.	Z-Trak is a series of 3D profile sensors that deliver high-resolution, real-time height measurements using laser triangulation.

**SPECIFICATIONS**


<b>Processor</b>	Type	1.8 GHz quad-core x7-E3950
<b>Memory</b>	Program	4 GB @ 1866 MHz
	Storage	32 GB
<b>Software</b>	OS	Win10 IoT
	Application	iNspect (-03 model)
		Sherlock 7 (-04 model)
Sherlock 8 (-04 model)		
<b>Camera Ports</b>	Interface	2 x GigE with PoE
<b>I/O</b>	General Inputs	8 + 2 common pins
	Camera Inputs	1 Trigger per camera
	General Outputs	8 + 2 common pins
	Camera Outputs	1 Strobe per camera
	LED Status	1/0 + 3 user defined
	Encoder	1x A, B & Z
<b>Industrial Network</b>	Hardware Port	1 x 10/100 BaseT
	Protocols	Ethernet/IP & Profinet
<b>Communications</b>	Ethernet	1 x GigE multi-use
	USB2	2 Ports
	USB3	2 Ports
	RS232	1 Port
<b>Display</b>	HDMI	1 Port
<b>Power</b>	Type	24 VDC @ 2A
	Connector	3 pin Header
	Reset	Recessed button on side panel
<b>Enclosure</b>	Type	Painted Aluminum
	Cooling	Passive Heat Sink
	Mounting	DIN

**SOFTWARE CHOICES WITH SENSORS**


Sensor	iNspect	Sherlock 7	Sherlock 8
<b>Genie Nano</b>	Yes	Yes	Yes
<b>Calibir</b>	Yes	Yes	Yes
<b>Z-Trak</b>	No	No	Yes

**Choice of Application Software**


To maximize user and application reach, VICORE offers choice of embedded application software.

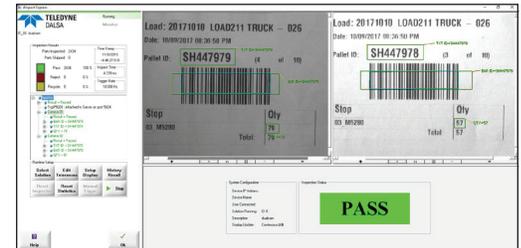

New users, or users of Teledyne smart camera technology, can be up and running in minutes with **iNspect's** easy-to-use interface.

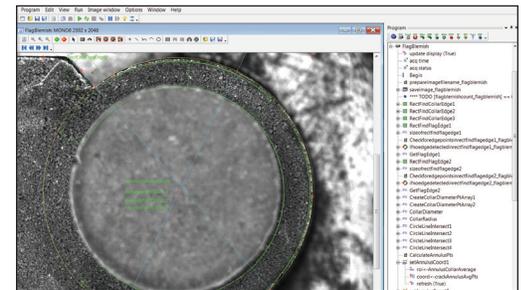

For users that need additional flexibility or customization, our flagship **Sherlock 7** software is loaded and ready for action.

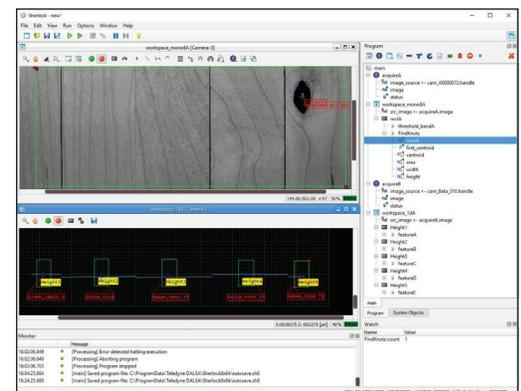

For users looking to measure height features using 3D profile sensors, our brand new **Sherlock 8** software is up to the task. Sherlock 8 expands on Sherlock 7 capabilities and offers improved ease-of-use. Sherlock 8 also supports 2D and thermal sensors for mixed applications.

**Americas**

Boston, USA  
 +1 978-670-2000  
 sales.americas@teledynedalsa.com

**Europe**

Krailling, Germany  
 +49 89-89-54-57-3-80  
 sales.europe@teledynedalsa.com

**Asia Pacific**

Tokyo, Japan  
 +81 3-5960-6353  
 sales.asia@teledynedalsa.com

Shanghai, China  
 +86 21-3368-0027  
 sales.asia@teledynedalsa.com