




IT-L6-02060

2K Quadlinear RGB + Monochrome CMOS Imaging Sensor

A Fast and Responsive 2K Quadlinear RGB + Monochrome CMOS Imaging Sensor

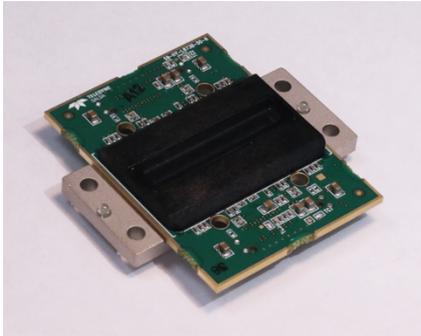

The IT-L6-02060 quadlinear sensor is a high performance, digital, RGB + monochrome line scan CMOS imaging sensor. The sensor has four individual lines for independent red, blue, green, and monochrome channels. Each colour has its own exposure control making it easier to perform white calibration. The sensor is optimized for high line rates (4 x 70 kHz) and low noise, while providing high responsivity and high quantum efficiency (QE). The sensor is designed for ease-of-integration and uses FR4 packaging.

The pixel features global shutter capability, 100% fill factor, and true correlated double sampling (CDS) for low noise.

FR4 packaging offers high signal integrity and simple interfacing for quick system integration. The interface consists of two 60-pin connectors, which contain input signals, such as EXSYNC (trigger), clocks and voltages, and output signals, such as data and strobe (s-LVDS). Access to the registers of the sensor is handled through a serial-peripheral interface (SPI), plus the temperature of the sensor can be monitored.

The two 60-pin connectors on the IT-L6 share the same electrical and mechanical interface with the entire IT-K and IT-L sensor series, whereby the two 60-pin connectors and four mounting holes are positioned identically relative to one another as well as having pin compatibility.

Key Features

- 4 pixel rows (RGB + monochrome) with independent exposure control
- High speed: 4 x 70 kHz
- FR4-based packaging
- Maximized conversion gain
- 100 % fill factor
- Low noise

Typical Applications

- Food sorting
- Recycling
- Document scanning
- Web inspection

Specifications

Line Rate	70 kHz, maximum
Output	12-bit digital LVDS
Resolution	2060 x 4 (2k quadlinear)
Pixel Size	14.08 μm x 14.08 μm
Random Noise	1.9 DN
Dynamic Range	66 dB
Conversion Gain	0.15 DN/e
Full Well	25 ke
Shutter Type	Global shutter
Responsivity	410 DN / nJ / cm ² @ 12-bit, peak
Power Consumption	4 W
Operating Temperature	0° to +60°C
Package	FR4
Regulatory Compliance	RoHS


Models			
Part Number	Resolution	Maximum Line Rates	Pixel Size
IT-L6-02060	2060 x 4	70 kHz	14.08 μm x 14.08 μm

Camera part number for sensor evaluation: P4-CC-02K07Q




IT-L6-02060

2K Quadlinear RGB + Monochrome CMOS Imaging Sensor

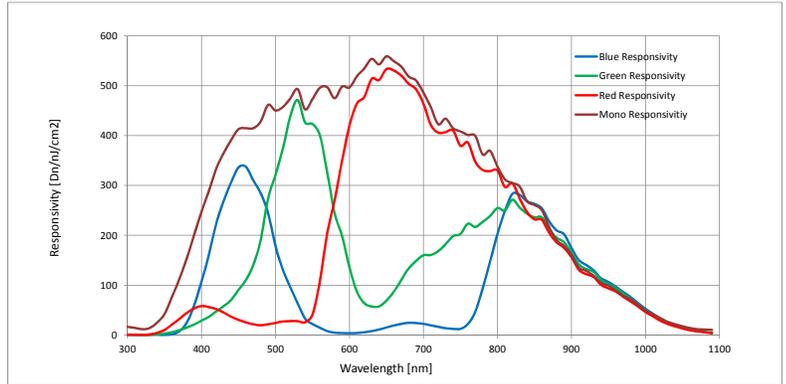

Note: Savitsky-Golay filtering applied, with 40 nm window and 1st order polynomial.

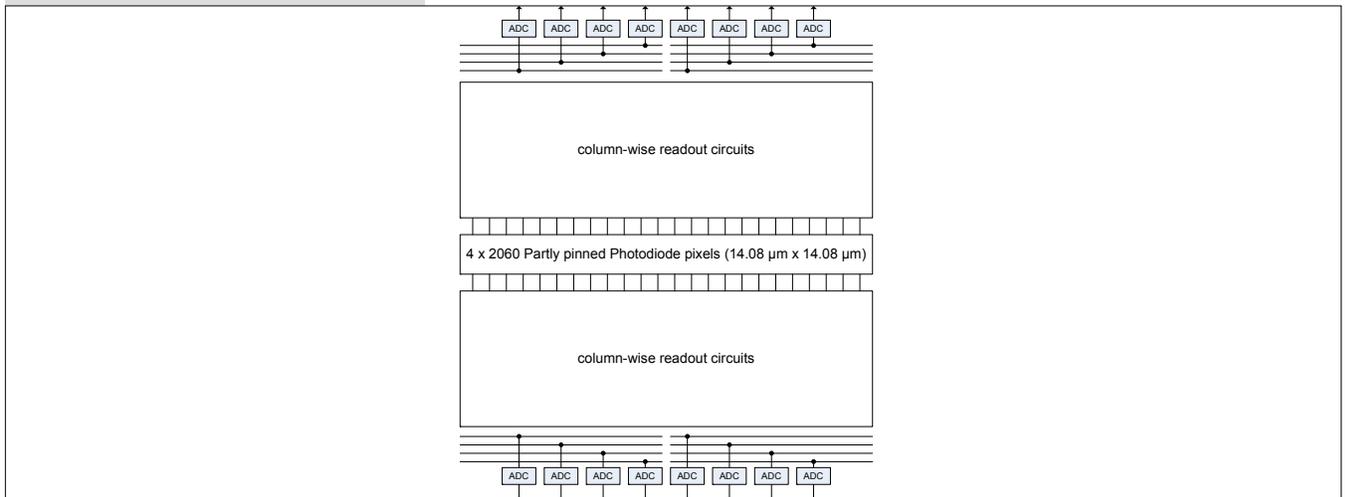

© 2016 Teledyne DALSA

All information provided in this document is believed to be accurate and reliable. No responsibility is assumed by Teledyne DALSA for its use. Teledyne DALSA reserves the right to make changes to this information without notice. Reproduction of this document in whole or in part, by any means, is prohibited without prior permission having been obtained from Teledyne DALSA. All trademarks or intellectual property mentioned herein belong to their respective owners.

About Teledyne DALSA

Teledyne DALSA is an international high performance semiconductor and electronics company that designs, develops, manufactures, and markets digital imaging products and solutions, in addition to providing wafer foundry services.

Teledyne DALSA Digital Imaging offers the widest range of machine vision components in the world. From industry-leading image sensors through powerful and sophisticated cameras, frame grabbers, vision processors and software to easy-to-use vision appliances and custom vision modules.

Teledyne DALSA is headquartered in Waterloo, Ontario, Canada. We have sales offices in the USA, Europe and Asia, plus a worldwide network of representatives and agents to serve you efficiently.

www.teledynedalsa.com

Americas

Boston, USA
+1 978-670-2000
sales.americas@teledynedalsa.com

Europe

Krailling, Germany
+49 89-89-54-57-3-80
sales.europe@teledynedalsa.com

Asia Pacific

Tokyo, Japan
+81 3-5960-6353
sales.asia@teledynedalsa.com

Shanghai, China
+86 21-6427-9081
sales.asia@teledynedalsa.com

Revision number 03-070-20107-00.
Revision date October 31, 2016.

